


# ALFL 10.2530.1


AllFive (1xLED 19W 830/3000K 2950lm)

— C0/C180 cd / 1000 lm    - - - C90/C270

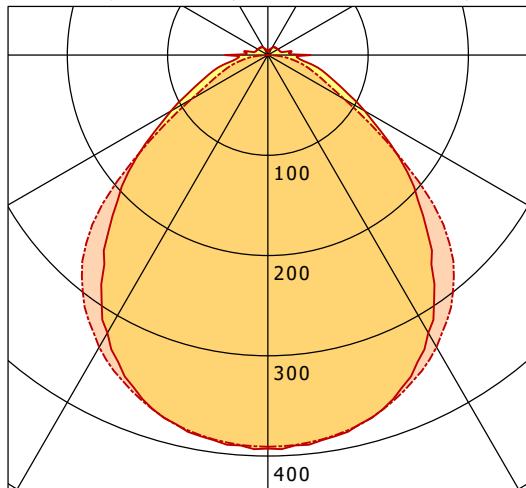

	C0	C90	C180	C270
0°	393	391	393	391
15°	378	378	378	378
30°	320	336	320	336
45°	215	253	215	253
60°	112	88	112	88
75°	54	36	54	36
90°	43	1	43	1
cd / 1000 lm				

Offset [m]    Cone width [m]    Illuminance [lx]

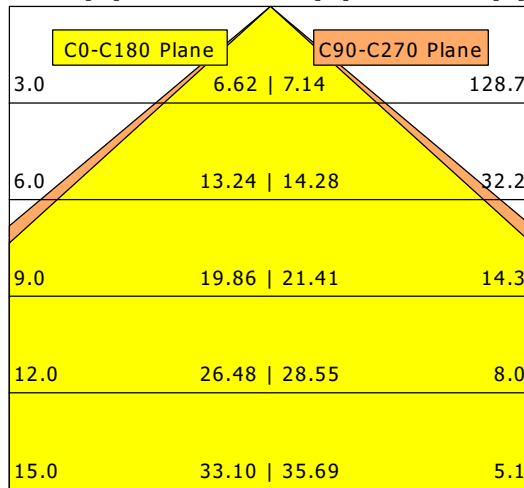

<b>η</b>	LED
Efficiency	155 lm/W
Direct/Indirect	↓ 95% / ↑ 5%
System Power	19 W
<b>UGR</b>	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.4
UGR C90/C270	22.1
CIE Flux Codes	55 84 95 95 100
Ra/CRI	>80