


ALFL 10.5030.1


AllFive (31W, 1xLED 31W 830/3000K 3740lm)

— C0/C180 cd / 1000 lm - - - C90/C270

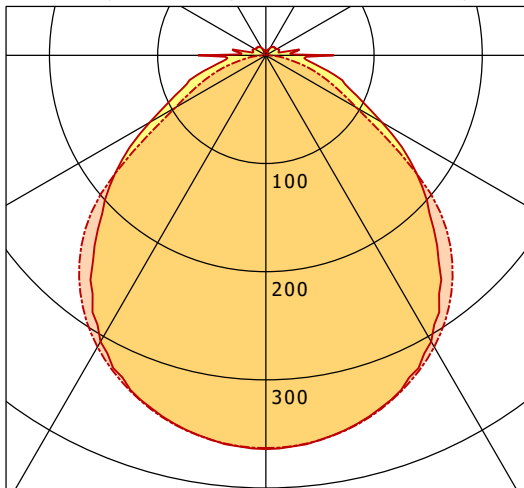

| | C0 | C90 | C180 | C270 |
|--------------|-----|-----|------|------|
| 0° | 364 | 363 | 364 | 363 |
| 15° | 349 | 350 | 349 | 350 |
| 30° | 306 | 311 | 306 | 311 |
| 45° | 216 | 239 | 216 | 239 |
| 60° | 124 | 97 | 124 | 97 |
| 75° | 63 | 37 | 63 | 37 |
| 90° | 63 | 1 | 63 | 1 |
| cd / 1000 lm | | | | |

Offset [m] Cone width [m] Illuminance [lx]

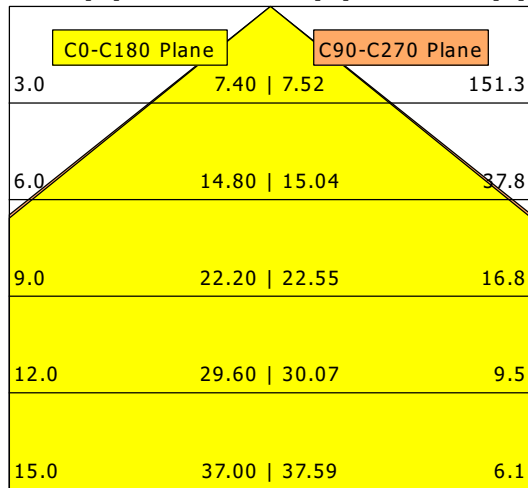

| | |
|--------------------|-----------------|
| η | LED |
| Efficiency | 121 lm/W |
| Direct/Indirect | ↓ 94% / ↑ 6% |
| System Power | 31 W |
| UGR | X=4H, Y=8H |
| Reflection factors | 70/50/20 |
| UGR C0/C180 | 22.9 |
| UGR C90/C270 | 20.8 |
| CIE Flux Codes | 52 82 95 94 100 |
| Ra/CRI | > 80 |