


ALFL 10.5030.1


AllFive (45W, 1xLED 45W 830/3000K 5300lm)

— C0/C180 cd / 1000 lm - - - C90/C270

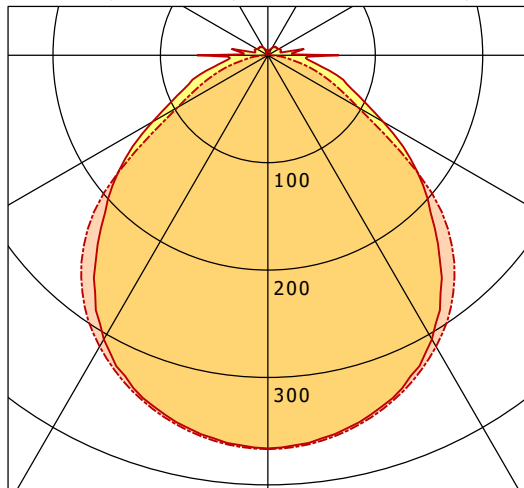

	C0	C90	C180	C270
0°	366	367	366	367
15°	350	352	350	352
30°	305	313	305	313
45°	217	240	217	240
60°	124	97	124	97
75°	63	36	63	36
90°	66	1	66	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

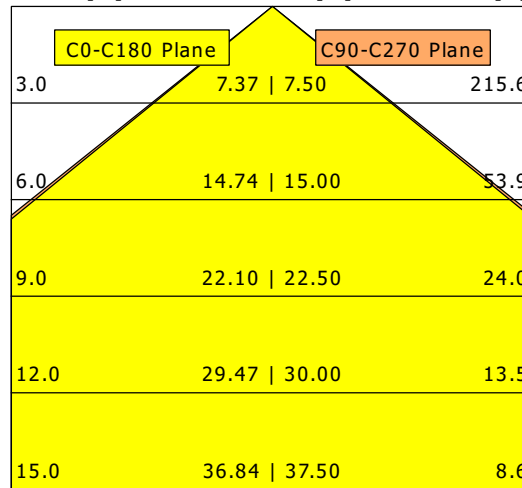

η	LED
Efficiency	118 lm/W
Direct/Indirect	↓ 94% / ↑ 6%
System Power	45 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	24.1
UGR C90/C270	22.0
CIE Flux Codes	52 82 95 94 100
Ra/CRI	> 80