


ALFL 10.5040.1


AllFive (31W, 1xLED 31W 840/4000K 3820lm)

— C0/C180 cd / 1000 lm - - - C90/C270

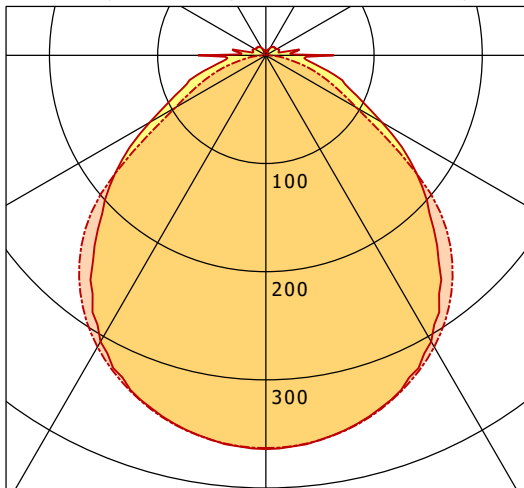

	C0	C90	C180	C270
0°	364	363	364	363
15°	349	350	349	350
30°	306	311	306	311
45°	216	239	216	239
60°	124	97	124	97
75°	63	37	63	37
90°	63	1	63	1
cd / 1000 lm				

Offset [m] Cone width [m] Illuminance [lx]

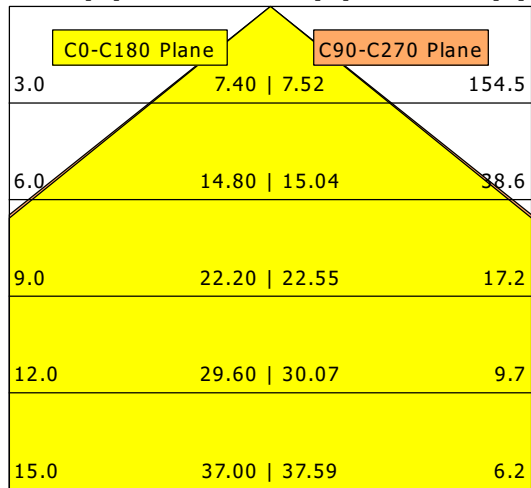

η	LED
Efficiency	123 lm/W
Direct/Indirect	↓ 94% / ↑ 6%
System Power	31 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	23.0
UGR C90/C270	20.8
CIE Flux Codes	52 82 95 94 100
Ra/CRI	> 80