


VFCPL 720.30/F

Vario Professional (1xLED 48W MEAT 2580lm)

— C0/C180 cd / 1000 lm - - - C90/C270

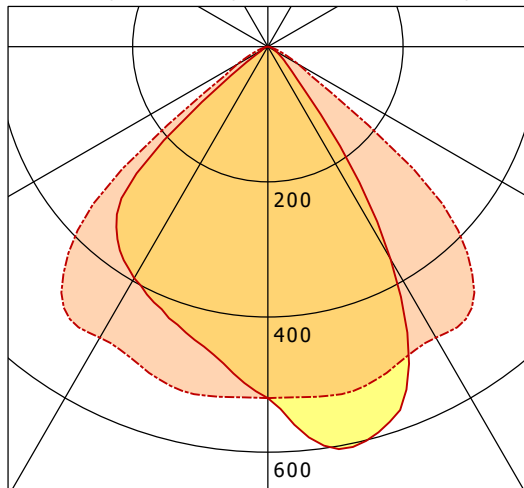

	C0	C90	C180	C270
0°	520	520	520	520
15°	598	524	444	524
30°	363	497	396	497
45°	47	409	294	409
60°	13	52	11	52
75°	4	7	5	7
90°	0	0	0	0
cd / 1000 lm				

LDC unsuitable for cone representation.
Asymmetric LDC.

η	LED
Efficiency	54 lm/W
Direct/Indirect	↓ 100% / ↑ 0%
System Power	48 W
UGR	X=4H, Y=8H
Reflection factors	70/50/20
UGR C0/C180	18.3
UGR C90/C270	25.8
CIE Flux Codes	70 97 100 100 100
Ra/CRI	---